




## Hydraulic Bollards

### HB-273

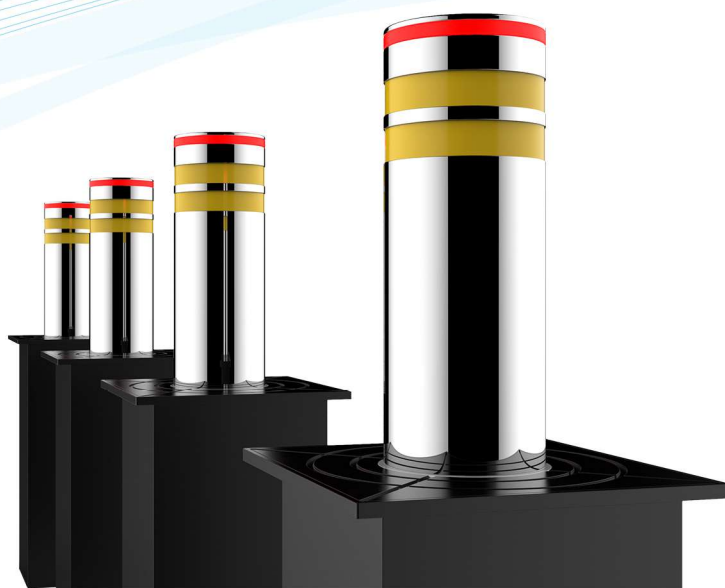

## Specification

Bollard height: 900mm

Lift height: 600 mm (Customized : 400 ~ 900mm)

Bollard diameter: 273 mm

Thickness: 6 mm

Protection grade: IP68

System dynamic power (w) : 3.75 KW / 380 V

Rising time: 1 ~ 6 s (adjustable)

Dropping time: 1 ~ 6 s (adjustable)

Working temperature: 25° ~ 70°

Storage environment: - 30° ~ 75°

Control mode (optional) : remote control, manual, reading card, access control and Loop Detector etc.,

Weight: +150 - 200 kg

#### System control

Hydraulic and electric control

#### Pressure bearing

80 tons container truck.

#### Anti-collision levels

K8

#### Material

Stainless steel 304, 316 stainless steel (optional)

Disclaimer: Brief specifications are mentioned here. Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development